



# BOXIT CEILING



## FEATURES

- Lithium battery (LiFePO<sub>4</sub>)
- Low power consumption
- Single and double sided decal
- Compliant emergency exits signage
- Replaceable, easy fit, quick release decals
- Maintained or non-maintained operation



## ENVIRONMENT

Environmentally friendly  
Lithium ion phosphate battery



## ROD MOUNT

Suspend the Boxit  
using a rod mount




## SINGLE POINT UNIT

Ektor products work as  
SPUs out of the box



## WALL MOUNT

Designed for easy  
mounting to walls

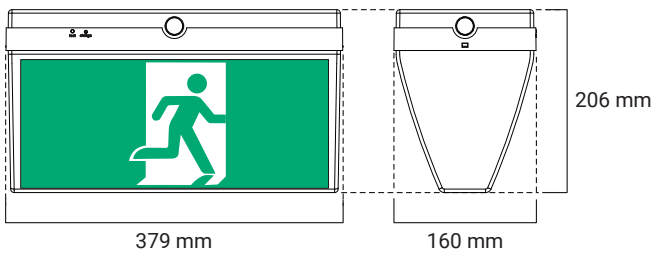

PRODUCT RANGE	
ORDER CODE	QTY
<b>EV-BOXIT-CEILING</b> Basic Ceiling Mounted Emergency Exit	4

- FEATURES**
- Lithium battery (LiFePO<sub>4</sub>)
  - Low power consumption
  - Single and double sided decal
  - Compliant emergency exits signage
  - Replaceable, easy fit, quick release decals
  - Maintained or non-maintained operation

TOTAL POWER CONSUMPTION (TPC)	
NON-MAINTAINED MODE	
MAX.	AVG.
3.60 W	3.33 W

ACCESSORY RANGE	
ORDER CODE	DESCRIPTION
<b>EV-BOXIT-DP</b>	Boxit Decal pack wall & ceiling
<b>EV-BOXIT-GT</b>	Boxit LED Gear tray
<b>EV-BOXIT-DIFF-CEIL</b>	Boxit Ceiling diffuser (decal pack included)
<b>EV-RODMOUNT-WHT</b>	Rod mount, incl. Bracket for roof /body
<b>ZC-BATT-1500MAH-1</b>	zencontrol 1500mAh 3.2V 1 Cell LiFePO <sub>4</sub> battery

## OPERATIONAL INFORMATION

GENERAL	
Voltage	~220-240V
Frequency	50Hz
Ambient temp.	0 - 40°C
Class	2
Wiring	Hardwired
Mounting type	Surface/suspended (Rod mount kit not included)
IP rating	IP20
Decal size	300 x 150 mm
Lamp power	0.95 W

EMERGENCY	
Rated duration	3 hours

COMPLIANCE	
Standards	IEC 60598-2-22 CISPR 15 EMC-2004/108/EC LVD-2006/95/EC

BATTERY		CHARGE	
Type	LiFePO <sub>4</sub>	Type	Variable
Voltage	3.2 V	Time	16 Hours
Code	zc-batt-1500mah-1		

CONSTRUCTION	
Body	PC
Diffuser	PC
Gear tray	PC

**NOTE:** For more information on the chemical resistance of our polycarbonate, please see our website.

Datasheet is subject to change without notice, E&OE  
Last updated: 27 September 2018 \_V1.0